

500-1D/2D/3D Drawer Warmers

CE

ALTO-SHAAM

Designed for both durability and exceptional food quality, Alto-Shaam's warming drawers seamlessly integrate into any kitchen layout where hot and fresh, ready-to-serve food needs to stay within easy reach. Featuring Halo Heat® technology, these drawers hold food at optimal serving temperatures without added water or harsh heating elements—preserving taste, texture, and freshness. Choose from flexible configurations: install in cabinets or counters, or stack units to make the most of your space.

Alto-Shaam's warming drawers feature a durable, non-magnetic, stainless steel exterior and removable stainless steel drawer rail supports. Each drawer includes one (1) GN 1/1 stainless steel pan—152mm deep. The unit is operated via an ON/OFF power switch and up and down arrow buttons on a digital display. It also includes a heat indicator light and a temperature display button.



Standard features

- Halo Heat...a controlled, uniform heat source that gently surrounds foods for better appearance, taste, and longer holding life.
- Product moisture is retained without adding water.
- Digital control senses temperature drops faster, providing quick heat recovery time.
- Can be built into cabinets or counters. Built-in trim kits are available.
- Stackable design.
- Vented for optimal moisture control.



TEMPERATURE

Temperature range: 16°C to 93°C



CAPACITY

Size	Pan Quantity	Product Weight per Drawer (kg)
500-1D	One (1) GN 1/1	16
500-2D	Two (2) GN 1/1	16
500-3D	Three (3) GN 1/1	16



ELECTRIC

Power Options and Cord/Plug Assemblies

NOTE: All cord/plug assemblies are 1.82M long.

230V

- | | |
|---|---------|
| ☐ 230V/50 Hz/1 Ph, C13, CEE 7/7 | 5038471 |
| ☐ 230V/50 Hz/1 Ph, C13, BS-1363 | 5038472 |
| ☐ 230V/50 Hz/1 Ph, C13, CH2-16P | 5038473 |
| ☐ 230V/50 Hz/1 Ph, AS/NZS 3112-2000 | 5038474 |
| ☐ 230V/50 Hz/1 Ph, C13, TYPE M IN1-16P | 5038475 |

EAC CE IP X3




UK
CA

500-1D/2D/3D Drawer Warmers




DIMENSIONS

500-1D

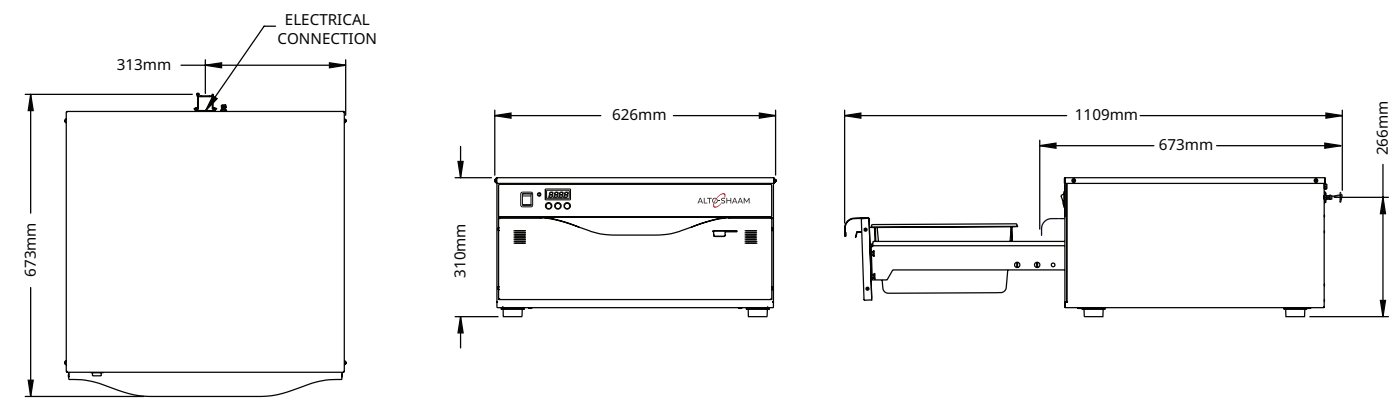


Shown with feet

500-2D

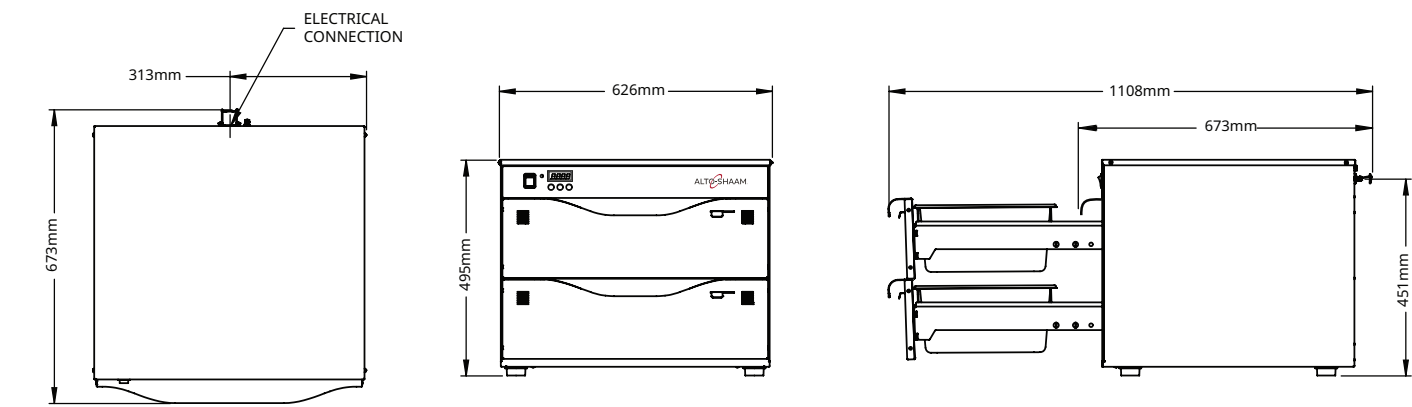

Shown with feet

500-3D






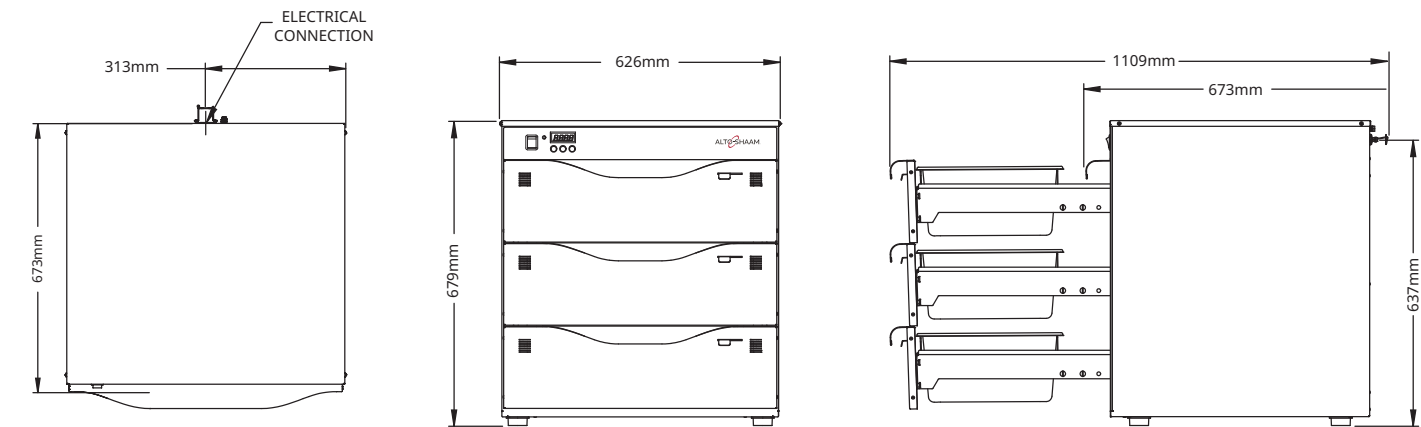


Shown with feet

500-1D/2D/3D Drawer Warmers



CUT-OUT DIMENSIONS

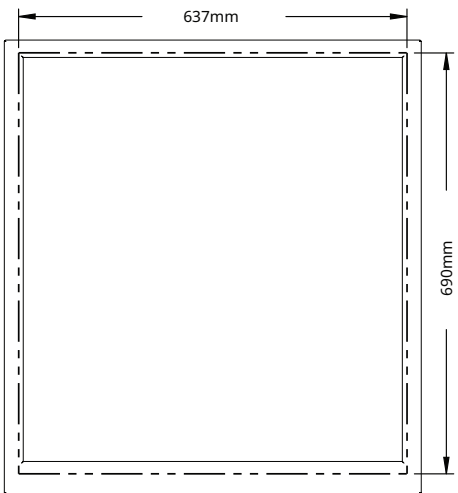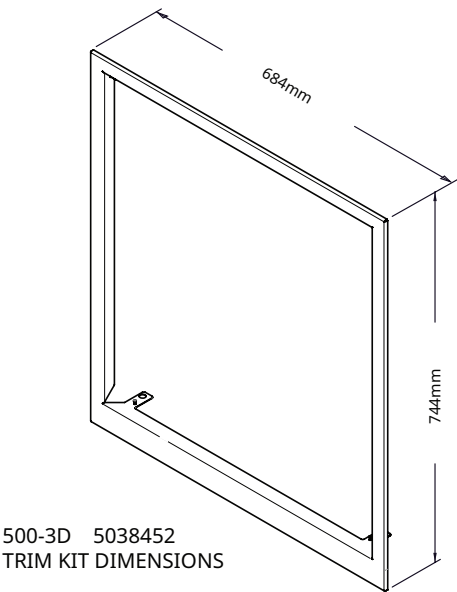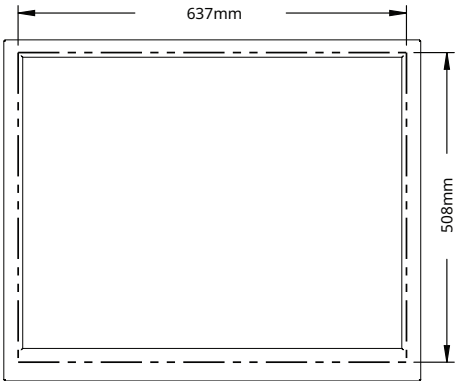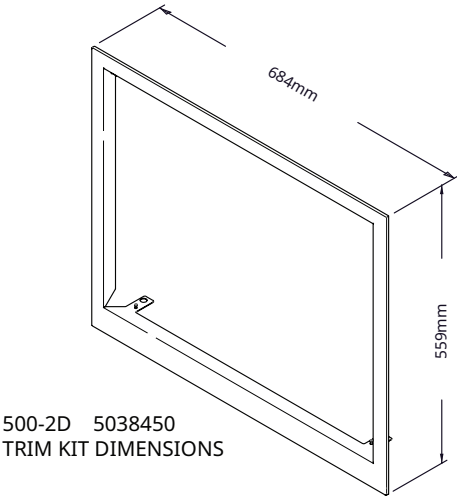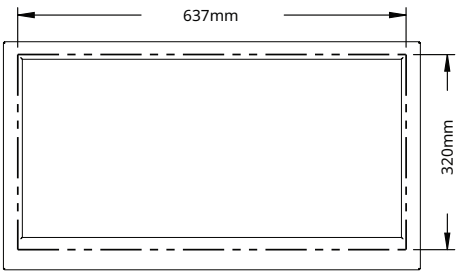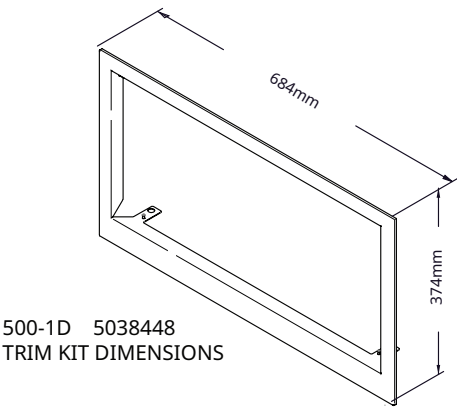

500-1D/2D/3D Drawer Warmers



CLEARANCE

Top:..... 51mm
Left: 25mm
Right:..... 25mm
Back: 76mm



HEAT

Heat of rejection

	Heat Gain qs, BTU/hr	Heat Gain qs, kW
500-1D	262	0.08
500-2D	262	0.08
500-3D	262	0.08



REQUIREMENTS

- Drawer warmer must be installed level.
- Drawer warmer must not be installed in any area where it may be affected by steam, grease, dripping water, extreme temperatures, or any other severely adverse conditions.

Options and Accessories

- ☐ Perforated pan grid, 381mm x 508mm [1231]
- ☐ Perforated pan grid, 305mm x 508mm GN1/1 [16642]
- ☐ Wire grate, stainless 460mm x 254mm x 19mm [SH-47573]
- ☐ Wire grate, chrome 460mm x 254mm x 19mm [SH-47325]

Extended warranty

- ☐ One-year warranty extension



WEIGHTS

Size	Net Weight (est.)	Shipping Weight (est.)	Carton Dimensions (L x W x H)
500-1D	36 kg	41 kg	762mm x 686mm x 406mm
500-2D	52 kg	57 kg	762mm x 686mm x 584mm
500-3D	68 kg	75 kg	762mm x 686mm x 762mm



ELECTRIC

500-1D/1DN 500-2D/2DN 500-3D/3DN	V	Ph	Hz	A	Breaker (A)	W
230V	230	1	50/60	2.6	15	590

Electrical connections must meet all applicable federal, state, and local codes.

CONTACT US

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.
Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | alto-shaam.com